

USB Dedicated Charging Port Controller for Fast Charging Protocol and QC 2.0/3.0

Description

The FP6601Q is a fast charge protocol controller for HiSilicon Fast Charging Protocol (FCP) and Qualcomm® Quick Charge™ 2.0/3.0 (QC 2.0/3.0) USB interface. The device can fast charging FCP or QC 2.0/3.0 powered device (PD). The protocol feature monitors USB D+/D- data line voltage or D- data line transmission and automatically adjusts output voltage of power bank and wall adaptor to optimize charge time.

FP6601Q can support not only USB BC compliant devices, but also Apple / Samsung devices and automatically detects whether a connected powered device is Quick Charge 2.0/3.0 or FCP capable before enabling output voltage adjustment. If a PD not compliant to Quick Charge 2.0/3.0 is detected the FP6601Q disables output voltage adjustment to ensure safe operation with legacy 5 V only USB PDs.

The FP6601Q is available in a space-saving SOT-23-6.

Features

- Support HiSilicon Fast Charging Protocol (FCP) for output voltage and current communication.
- Support Qualcomm® Quick Charge™ 2.0/3.0
 - Class A : 5V/9V/12V Output Voltage.
- Automatic Selection FCP and QC2.0/3.0 protocols.
- Supports USB DCP Shorting D+ Line to D- Line per USB Battery Charging Specification, Revision 1.2.
- Meets Chinese Telecommunication Industrial Standard YD/T 1591-2009
- Supports USB DCP applying 2.7V on D+ line and 2.7V on D- line.
- Supports USB DCP applying 1.2V on D+ and D- lines
- SOT-23-6 Pb-Free Package

Applications

- Wall-Adapter, Smart Phones, Tablets, Netbooks
- Mobile / Tablet Power Bank
- Car Charger
- USB Power Output Ports

Pin Assignments

SOT-23-6 Marking

Part Number	Product Code
FP6601QS6	FT4



代理證明書

Mr. Zheng: 18948314942
QQ: 2851339685

茲證明

天钰科技股份有限公司(Fitipower integrated technology Inc.) 授權
深圳市百盛新紀元半導體有限公司對 Fitipower integrated technology
Inc.(FITI)的 Power IC 擁有經銷及販賣權利，並針對客戶使用 FITI 商
品上有任何疑問，將可直接反映到天钰科技股份有限公司以維護客戶使
用上的權利。

S6 Package(SOT-23-6)




Figure 1. Pin Assignment of FP6601Q

Typical Application Circuit

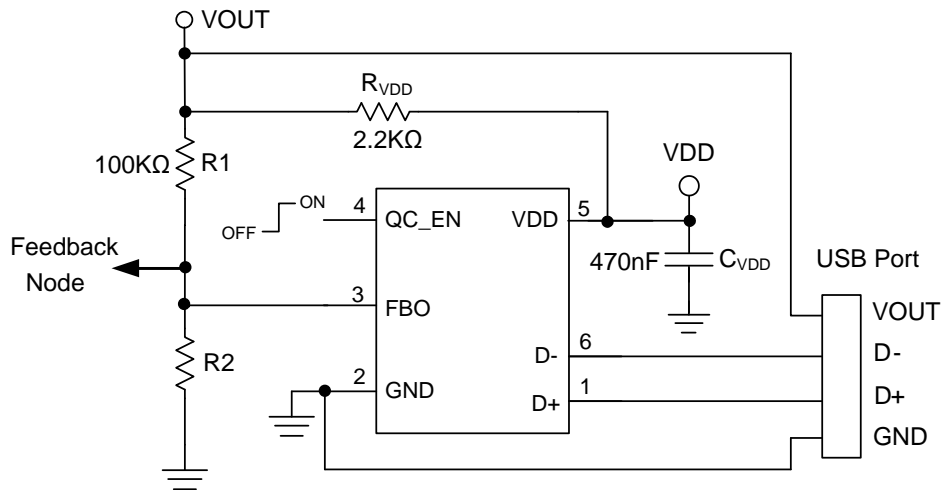


Figure 2. Typical Application Schematic

设计指导：<http://www.szparkson.net/product/213.html>


Output Voltage Lookup Table(QC2.0/3.0)

D+	D-	Output Voltage
0.6V	0.6V	12V
3.3V	0.6V	9V
0.6V	3.3V	Continuous mode
0.6V	High-Z	5V (Default)

举例原理图：

IC代理商：深圳市百盛新纪元半导体有限公司

QC3.0 PL6650 + FP6601Q原理图

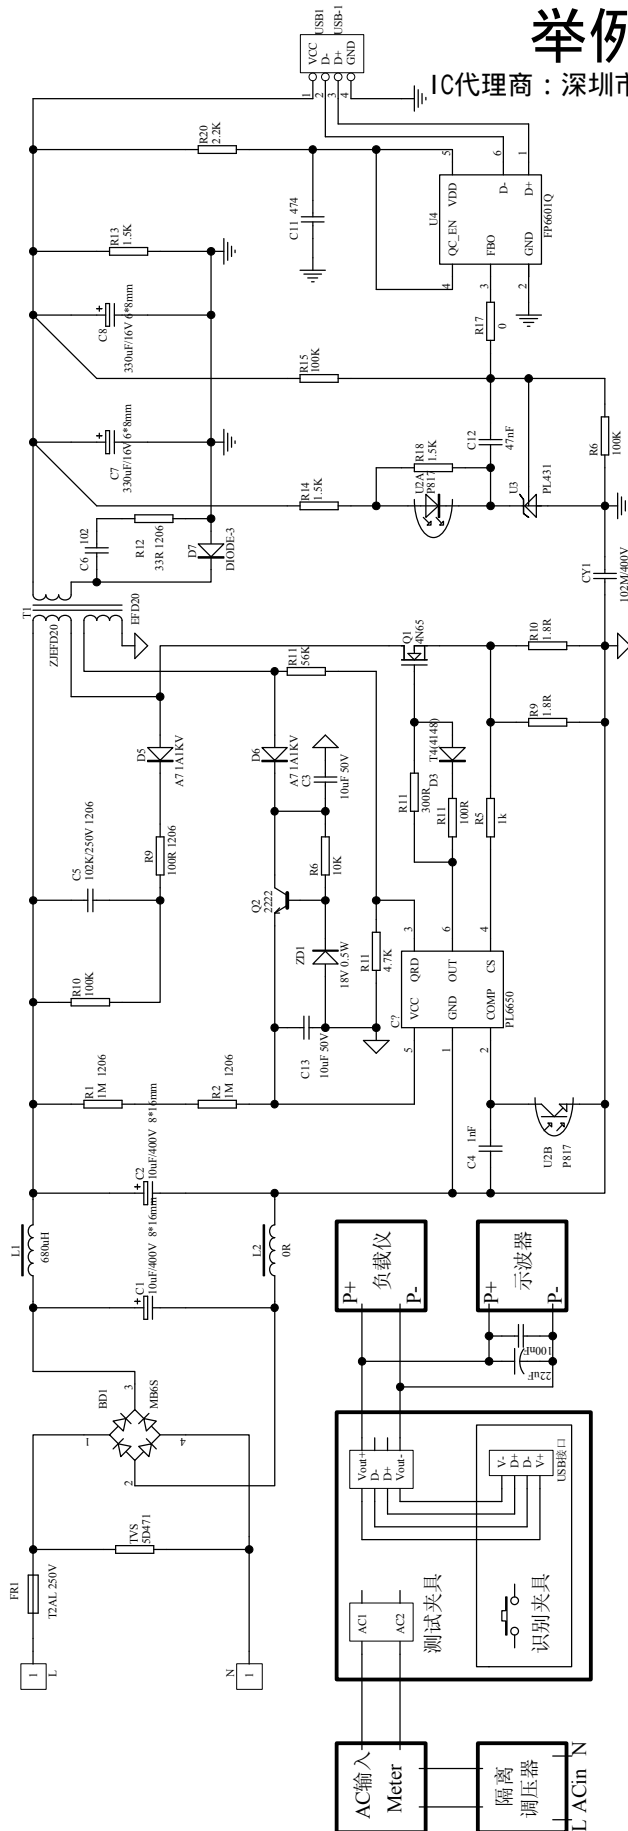

Functional Pin Description

Pin Name	Pin No. (SOT-23-6)	Pin Function
D+	1	USB D+ data line input. Recommended this pin connect without resistors(open) or with a resistor higher than 1MΩ connect to GND.
GND	2	Ground Pin.
FBO	3	Feedback output. Current Sink/Source FB Node.
QC_EN	4	QC_Enable: High-Z with QC3.0 and FCP function; logic low disable QC3.0 and FCP function.
VDD	5	Power Supply Input Pin.
D-	6	USB D- data line input

Block Diagram

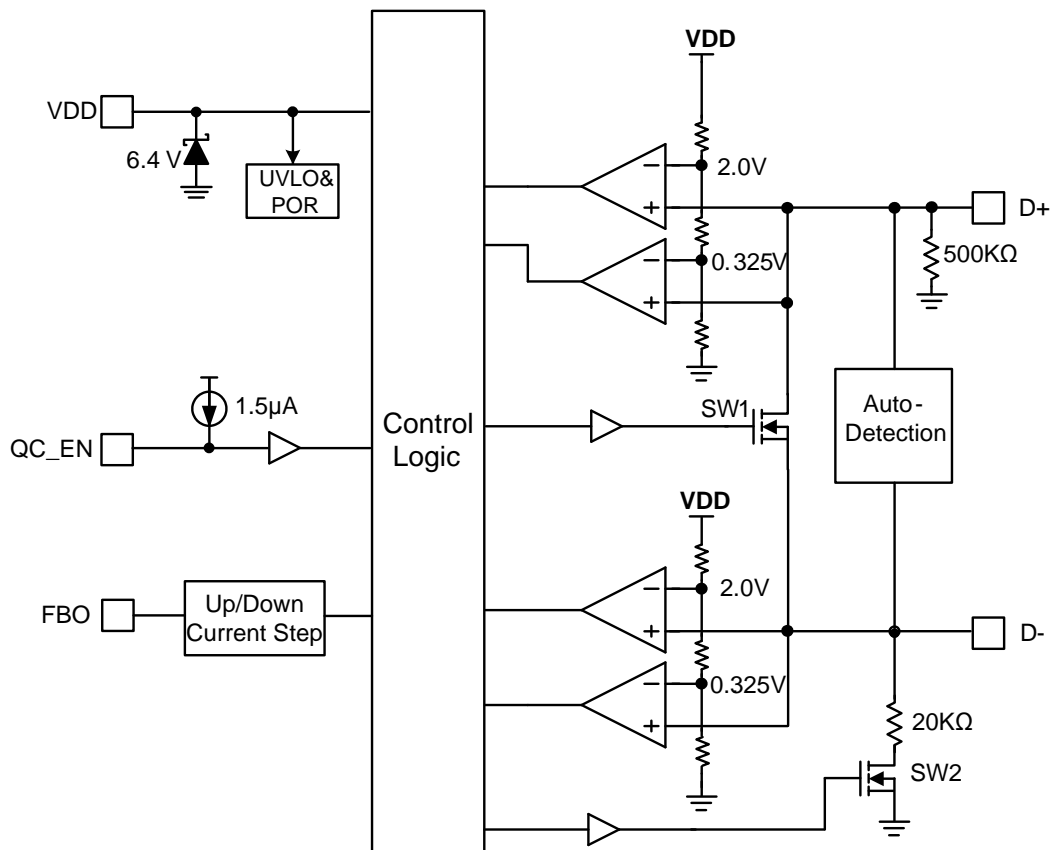


Figure 3. Block Diagram of FP6601Q

Absolute Maximum Ratings

- Input Supply Voltage VDD ----- - 0.3V to + 6.5V
- All Other Pins Voltage ----- - 0.3V to + 6.5V
- Maximum Junction Temperature (T_J)----- + 150°C
- Storage Temperature (T_S)----- - 65°C to + 150°C
- Lead Temperature (Soldering, 10sec.) ----- +260°C
- Power Dissipation @ T_A=25°C, (P_D)
 - SOP-8 ----- 1.39W
- Package Thermal Resistance, (θ_{JA}):
 - SOP-8----- 90°C/W
- Package Thermal Resistance, (θ_{JC}):
 - SOP-8----- 39°C/W

Note1 : Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

Recommended Operating Conditions

- Input Supply Voltage (VDD)----- 3.2V ~ 6.4V
- Operation Temperature Range (T_{OPR}) ----- -40°C to +85°C

Note : Over operating free-air temperature range (unless otherwise noted)

Electrical Characteristics

(VDD=5V, T_A=25°C and the recommended supply voltage range, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Power						
VDD Input Voltage Range	V _{DD}		3.2		6.4	V
Input UVLO Threshold	V _{UVLO(VTH)}	V _{DD} Falling	2.5		2.9	V
VDD Supply Current		V _{DD} =5V, Measure V _{DD} ,		200		μA
VDD Shunt Voltage	V _{DD(SHUNT)}	I _{VDD} = 3mA	5.9	6.4	6.8	V
High Voltage Dedicated Charging Port (HVDCP)						
Data Detect Voltage	V _{DAT(REF)}		0.25	0.325	0.4	V
Output voltage selection reference	V _{SEL_REF}		1.8	2.0	2.2	V
D+ High Glitch Filter Time	T _{GLITCH(BC)-D+_H}		1000	1250	1500	ms
D- Low Glitch Filter Time	T _{GLITCH(BC)-D-_L}			1		ms
Output Voltage Glitch Filter Time	T _{GLITCH(V)CHANGE}		20	40	60	ms
D- Pull-Down Resistance	R _{D-(DWN)}			20		KΩ
Continuous Mode Glitch Filter Time	T _{GLITCH-CON T-CHANGE}		100		200	μs
D+ Leakage Resistance	R _{DAT-LKG}	V _{DD} =3.2-6.4V, V _{D+} =0.6-3.6V Switch SW1=Off	300	500	800	KΩ
Switch SW1 on-resistance	R _{DS_ON,N1}	V _{DD} =5V, SW1= 200μA			40	Ω
Up/Down Current Step	I _{UP} , I _{DOWN}	I _{UP} = 40μA (9V), 70μA (12V), I _{DOWN} = 14μA (3.6V)		2		μA
DCP 1.2V Charging Mode						
D+ _{1.2V} /D- _{1.2V} line output voltage			1.08	1.2	1.32	V
D+ _{1.2V} /D- _{1.2V} line output Impedance				100		KΩ
Apple 2.4A Mode						
D+ _{2.7V} /D- _{2.7V} line output voltage			2.57	2.7	2.84	V
D+ _{2.7V} /D- _{2.7V} line output Impedance				33.6		KΩ
D- SECTION (FCP)						
D- FCP Tx Valid Output High	V _{TX-VOH}		2.55		3.6	V
D- FCP Tx Valid Output Low	V _{TX-VOL}				0.3	V
D- FCP Rx Valid Output High	V _{RX-VIH}		1.4		3.6	V
D- FCP Rx Valid Output Low	V _{RX-VIL}				1.0	V

Electrical Characteristics(Continued)


(VDD=5V, T_A=25°C and the recommended supply voltage range, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
D- Output Pull-Low Resistance (FCP)	R _{PD}		400	500	600	Ω
Unit Interval For FCP PHY communication	UI	f _{CLK} = 125KHz	144	160	176	μs

Note : Not production tested.

Outline Information


SOT-23-6 Package (Unit: mm)

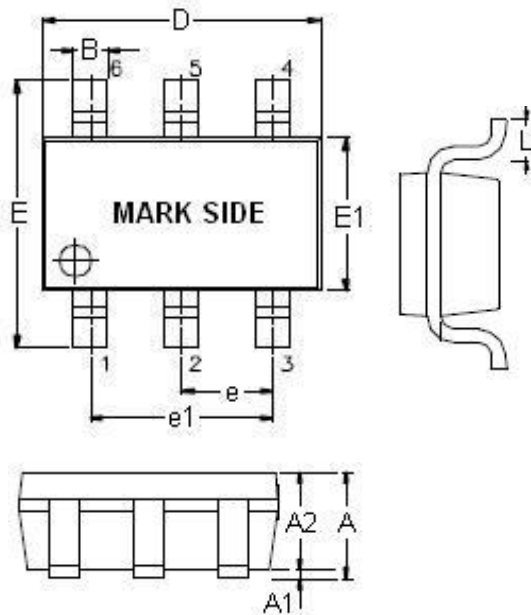

SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.90	1.45
A1	0.00	0.15
A2	0.90	1.30
B	0.30	0.50
D	2.80	3.00
E	2.60	3.00
E1	1.50	1.70
e	0.90	1.00
e1	1.80	2.00
L	0.30	0.60

Note : Followed From JEDEC MO-178-C.

Carrier Dimensions

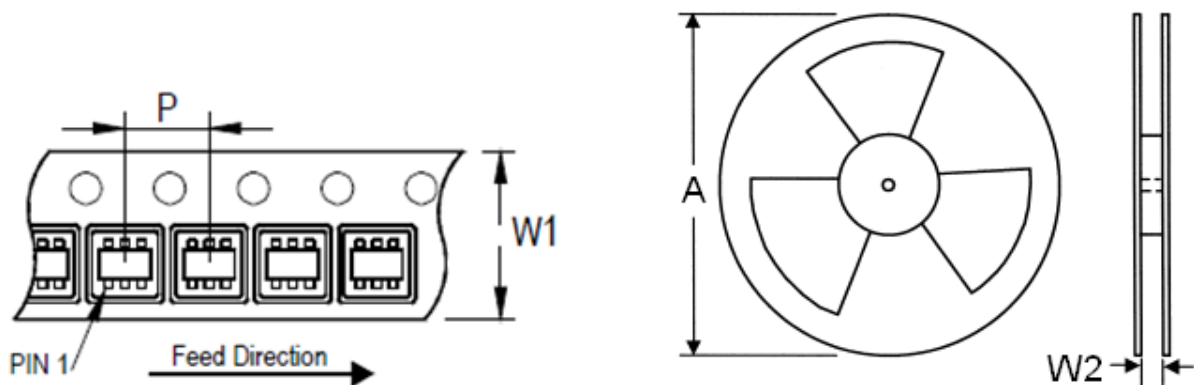

Tape Size (W1) mm	Pocket Pitch (P) mm	Reel Size (A)		Reel Width (W2) mm	Empty Cavity Length mm	Units per Reel
		in	mm			
8	4	7	180	8.4	300~1000	3,000

Life Support Policy

Fitipower's products are not authorized for use as critical components in life support devices or other medical systems.